



1. vSpace - Product Registration - Registration Online (Based on version vSpace 4.9.3.5 for E-Series)

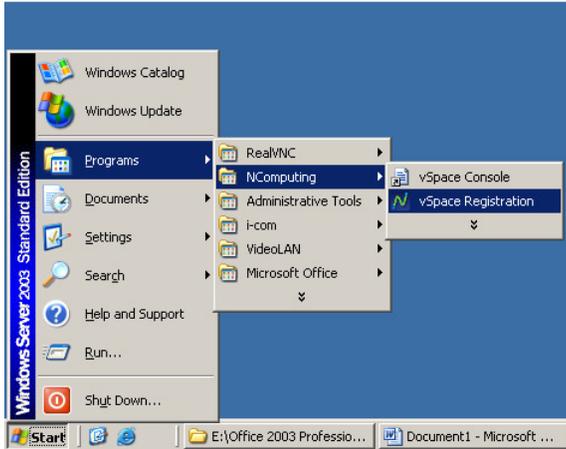


1. Before start registration process please remember that all NMNTs need to be on active session or if vSpace trial version expired, they need to try to connect server (black screen will be on).

Product registration is required after 30 days of use. Until the product has been registered vSpace cannot be updated and user sessions are limited to one hour. Select "vSpace Registration" in the Windows Start menu.


At any time during the registration process, you can click on the "Cancel" button and the process will be cancelled, or you can use the "Back" button to return to previous screens in the registration process to change your entries.

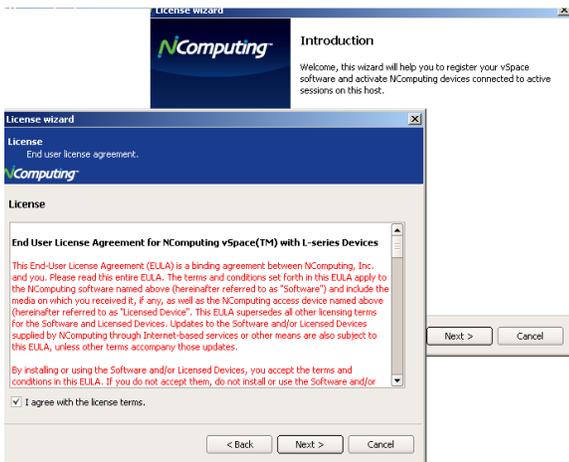

2. At the registration program "welcome" screen, if vSpace password protection is turned on, you will need to enter your password. Then Click the [Next] button.

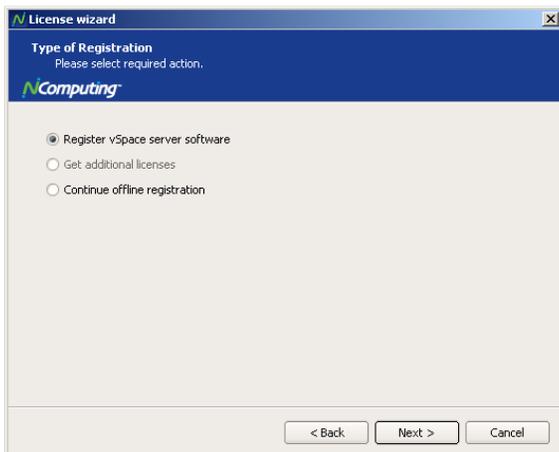

3. In the case of Online Registration, follow the instructions below. Otherwise skip to the section titled "Offline Registration". If you want to online register your software and E-Series access devices, leave the "Register" radio button selected, and click "Next."

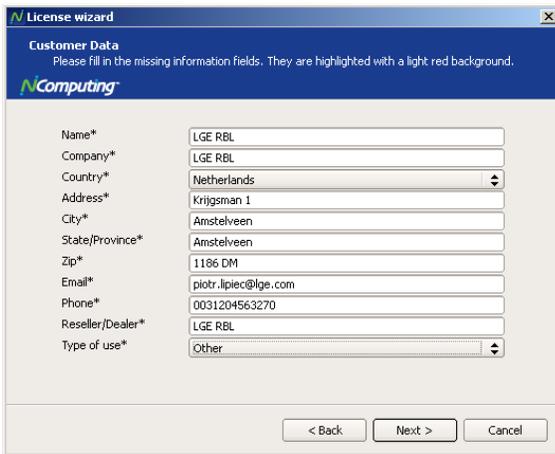


License wizard
Customer Data
 Please fill in the missing information fields. They are highlighted with a light red background.

Computing

Name* LGE RBL
 Company* LGE RBL
 Country* Netherlands
 Address* Krijgsman 1
 City* Amstelveen
 State/Province* Amstelveen
 Zip* 1186 DM
 Email* piotr.lipiec@lge.com
 Phone* 0031204563270
 Reseller/Dealer* LGE RBL
 Type of use* Other

< Back Next > Cancel

- At the "Customer Data" screen, if the data fields are not already populated, enter the registered user's relevant information. Each field in this window must be filled in. Once all data has been entered, click on the [Next] button.

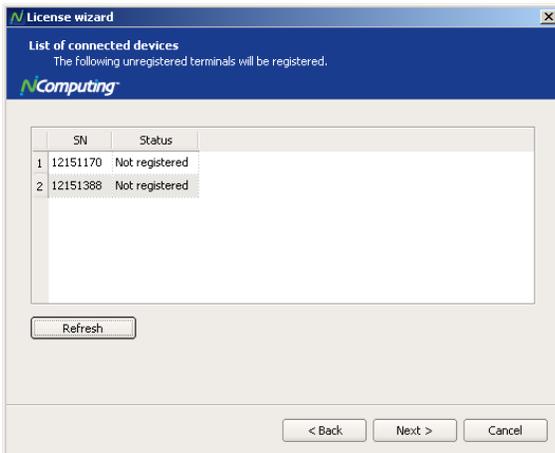

License wizard
List of connected devices
 The following unregistered terminals will be registered.


Computing

SN	Status
1 12151170	Not registered
2 12151388	Not registered

Refresh

< Back Next > Cancel

- Active NMNT ID will appear on the screen
 The registration wizard will then show you a list of all unregistered E-Series access devices that are currently connected to this vSpace host. You cannot select which devices will be registered – all devices shown in this list will be registered.

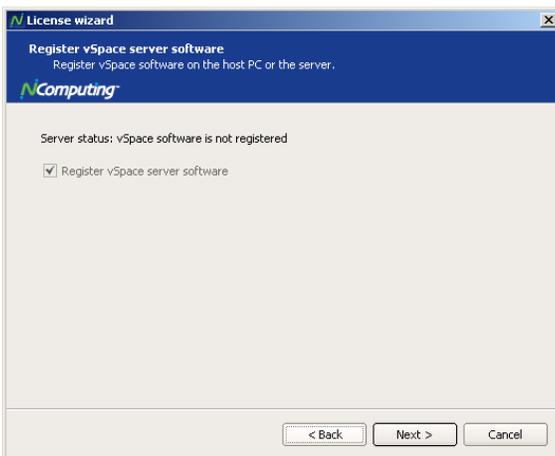

License wizard
Register vSpace server software
 Register vSpace software on the host PC or the server.


Computing

Server status: vSpace software is not registered


Register vSpace server software

< Back Next > Cancel


- Status of the server will be displayed

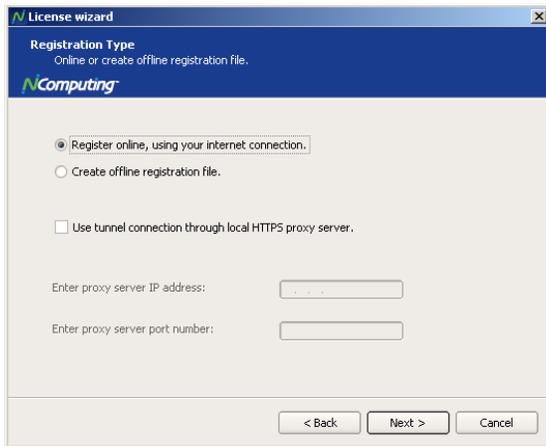

7. Select the “Register online, using your internet connection” and click “Next.”

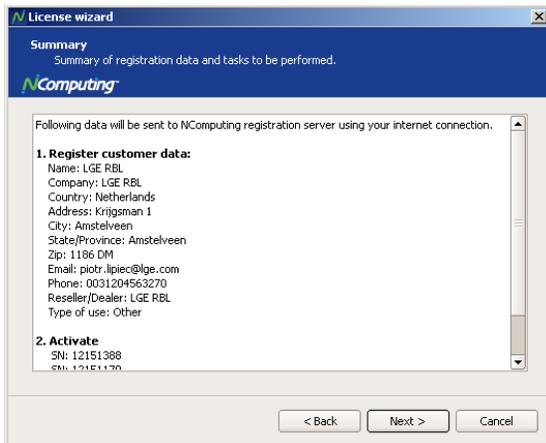


8. Before the registration wizard communicates with the registration server, you will get the following “Summary” screen showing all user information that will be registered with the vSpace software. Also, any connected but unregistered E-Series access devices will be listed for registration. If the data is correct, click on the “Register” button or click “Back” if you wish to change any of the information.

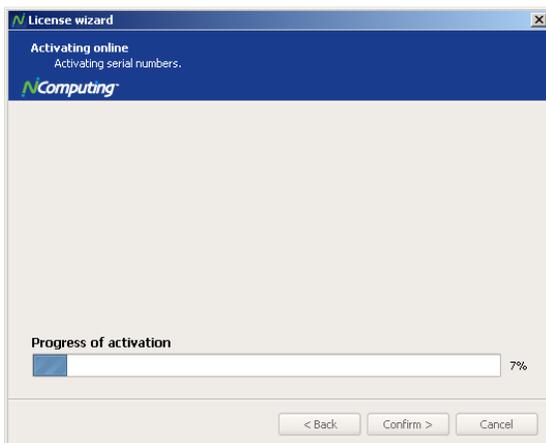


9. Connection - then you get a registration progress screen followed by “Registration results.”
 When your registration is complete, you see the “Registration results” screen. Be sure to click the check box for the “Register future E-Series devices in the background” option, if you want vSpace to automatically register any unregistered E-Series access devices that connect to this system in the future. Use of this “background registration” feature requires standard internet connectivity.

2. vSpace - Product Registration – Registration Offline (Based on version vSpace 4.9.2. for E-Series)

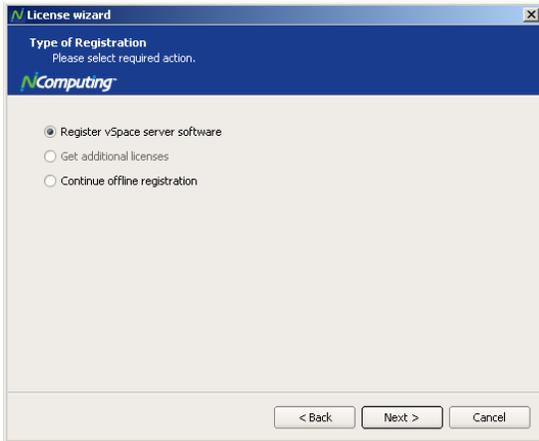


10. Repeat Steps 1-2,


If you don't have standard internet connectivity, you can use standard email to register your vSpace software and E-Series access devices. To use offline registration, again select the "Register" option, and click [Next] button

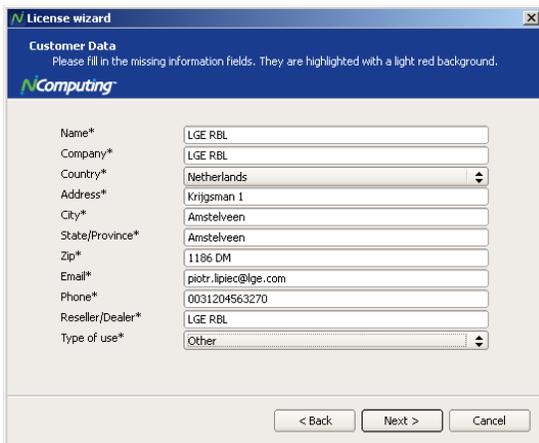


11. At the "Customer Data" screen, if the data fields are not already populated, enter the registered user's relevant information. Each field in this window must be filled in. Once all data has been entered, click on the [Next] button.

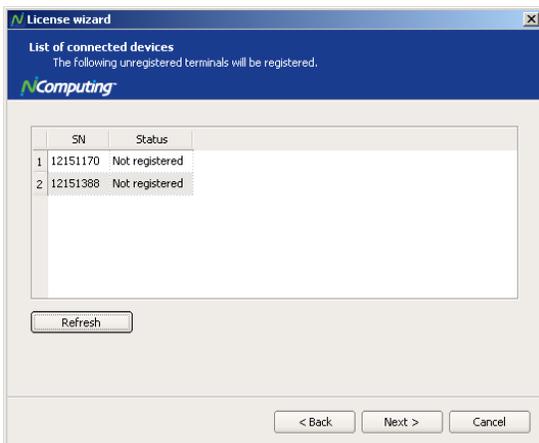


12. The registration wizard will then show you a list of all unregistered E-Series access devices that are currently connected to this vSpace host. You cannot select which devices will be registered – all devices shown in this list will be registered.

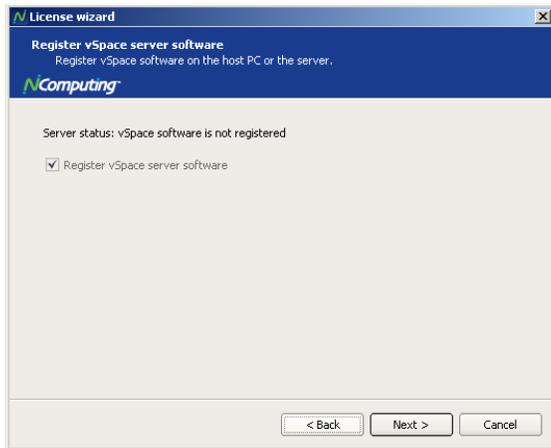


13. Status of the server will be displayed

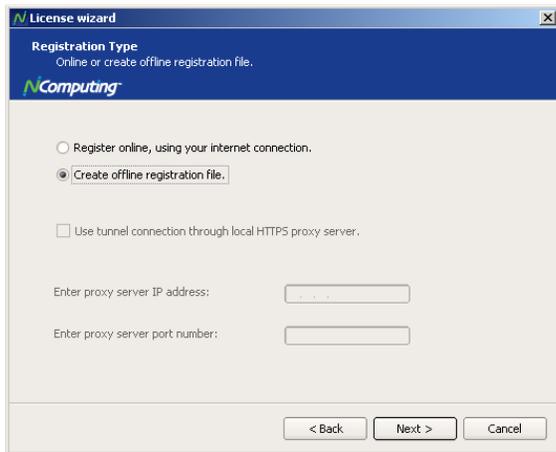


14. On the next screen you then select the "Create off line registration file" option and click [Next] button.

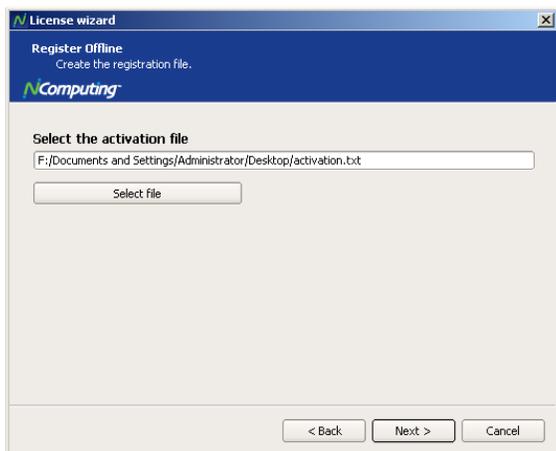

15. You'll need to find and select location where you wish to store the registration data file that you'll later send via email to nComputing. **Note:** you cannot type directly into the "Create activation file" field, but you must click on the [Select file] button to navigate to the directory where you wish to store the offline registration data file.

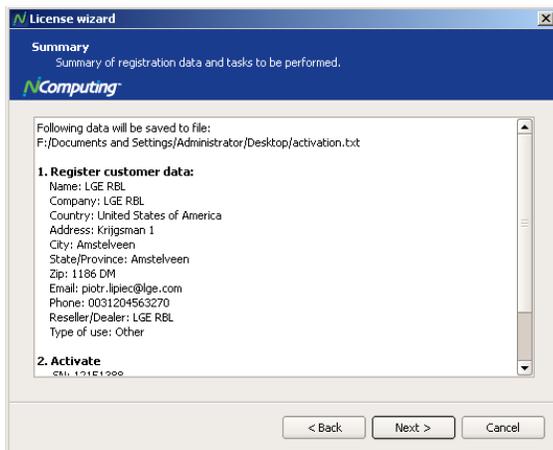


- Before the registration wizard create data file, you will get a "Summary" screen showing all user information that will be written to the data file. Also, any connected but unregistered E-Series devices will be listed for registration at point 2. Activate. Click [Back] if you wish to change any of the information.

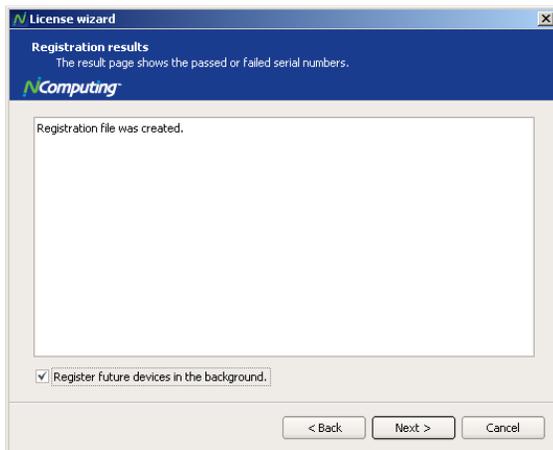

- Information about creating registration will be shown.




- If the data is correct, click on the [Finish] button. Afterward send email with created "txt" file to registration@ncomputing.com.

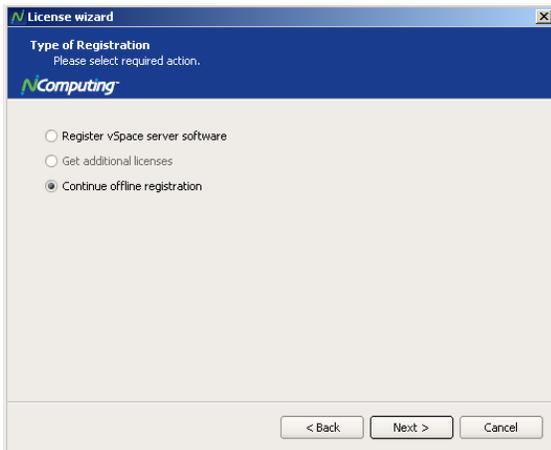


19. After receive license key (file with extension “*.lic” for example: 12151388.lic), please continue registration and repeat steps from 1 and 2.

Pick “Continue offline registration” and follow by [Next] button.

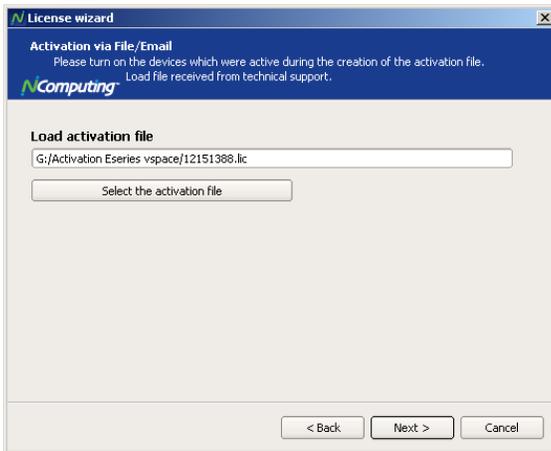

20. Search for the license file received from nComputing by [Select the activation file] and [Next] button click.

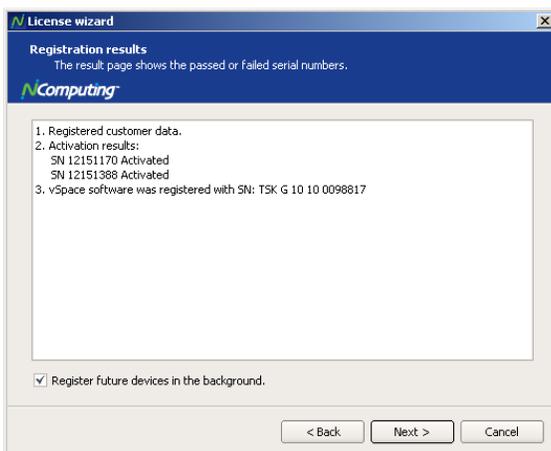

21. Summary of activation will appear on the screen, highlight “register future devices in background” and click [Next].



22. [Finish] button is the last step of the offline activation process.